FOREFOOT

be POD



FOREFOOT SCREWS

FHORTHO AN OLYMPUS GROUP COMPANY

POWER DRIVEN SCREW SYSTEM FOR FOREFOOT OSTEOTOMIES

- The **self-drilling** and **self-tapping screws** in the Be POD range address metatarsal and phalangeal osteotomies via a simple technique resulting in stable reliable osteosynthesis.
- Two types of cannulated self-drilling and self-tapping screws are available:
 - a "3A" self-compressing, self-drilling and self-tapping screw, with a differential pitch;
 - a "percutaneous" **self-drilling**, and **self-tapping** screw, with a continuous thread.

Ø2.5 mm

11 sizes: Lg 10 mm to 30 mm

3A SCREW

• SELF-COMPRESSING/SELF-DRILLING/SELF-TAPPING

Self-compressing, self-drilling and self-tapping screw features differential pitch and K-wire guidance for precise placement.

Indications:

Chevron, mini-chevron, scarf, base, and all compressive osteotomies: metatarsal and phalangeal, distal and proximal.



PERCUTANEOUS SCREW


· SELF-DRILLING/SELF-TAPPING

Cannulated screw that features a continuous thread pitch and K-wire guidance for precise placement.

Indications:


Non-compressive osteotomies: metatarsal and phalangeal, distal and proximal.



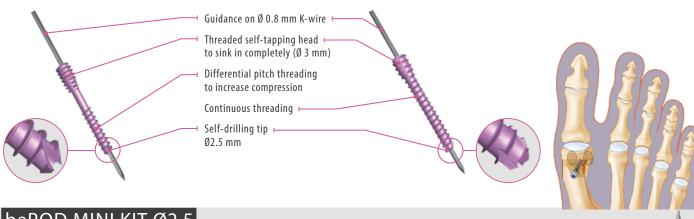

bePOD MINI KIT Ø2.5

	REF.	DESIGNATION
1	265 614	bePOD K-wire Ø0.8 mm L80 mm
2	264 257	bePOD K-wire Ø0.8 mm L130 mm
3	265 788	bePOD cannulated screwdriver
4	264 253	bePOD motorized screwdriver
5	265 613	bePOD universal measurement indicator 80/130 mm
6	265 615	bePOD screw drill Ø2.5 mm
7	266 492	Screwdriver for removal T7 Torx
8	264 585	bePOD mini kit 3A/percut Ø2,5 mm basket

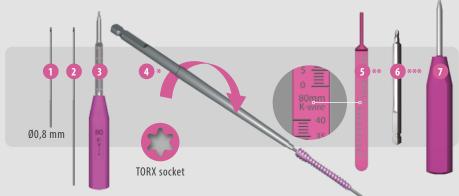

- * If the motor screwdriver disengages during screwing, it is recommended to finalize screwing with the cannulated hand screwdriver (ref. 265 788)
- ** Check the length of the K-wire used (80 or 130 mm) with the universal measurement indicator
- *** It is recommended to prepare the insertion of the head of the screw using the drill, especially if motor insertion of the screw is desired

- The same screws are used to fix phalangeal and metatarsal osteotomies.
- These screws are made from titanium alloy (TA6V) and are biocompatible.
- Individually-packaged sterile screws and instrumentation offer convenience and traceability.
- They are available in two diameters: Ø 2.5 mm and Ø 3 mm.



3A SCREW

• SELF-COMPRESSING/SELF-DRILLING / SELF-TAPPING

Self-compressing, self-drilling and self-tapping screw features differential pitch and K-wire guidance for precise placement.

Indications:

Chevron, mini-chevron, scarf, base, and all compressive osteotomies: metatarsal and phalangeal, distal and proximal.



PERCUTANEOUS SCREW


· SELF-DRILLING/SELF-TAPPING

Cannulated screw that features a continuous thread pitch and K-wire guidance for precise placement.

Indications:


Non-compressive osteotomies: metatarsal and phalangeal, distal and proximal.



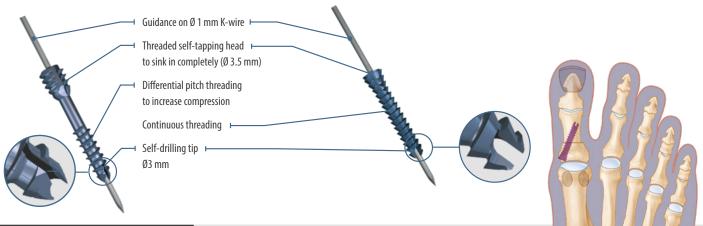

bePOD MINI KIT ØØ3

REF.		DESIGNATION
1	254 920	bePOD K-wire Ø1 mm L130 mm
2	256 213	bePOD cannulated measuring screwdriver
3	256 446	bePOD motorized screwdriver
4	257 408	bePOD mini kit 3A/percut Ø3 mm basket

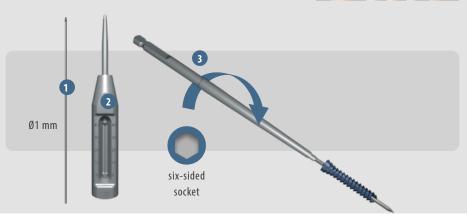

PERCUTANEOUS SCREWS Ø2.5

bePOD percutaneous cannulated screw L10 mm

264 241

	3A SCREWS Ø2.5
REF.	DESCRIPTION
264 229	bePOD 3A cannulated screw L10 mm
264 230	bePOD 3A cannulated screw L12 mm
264 231	bePOD 3A cannulated screw L14 mm
264 232	bePOD 3A cannulated screw L16 mm
264 233	bePOD 3A cannulated screw L18 mm
264 234	bePOD 3A cannulated screw L20 mm
264 235	bePOD 3A cannulated screw L22 mm
264 236	bePOD 3A cannulated screw L24 mm
264 237	bePOD 3A cannulated screw L26 mm
264 238	bePOD 3A cannulated screw L28 mm
264 239	bePOD 3A cannulated screw L30 mm

	3A SCREWS Ø3
REF.	DESCRIPTION
256 427	bePOD 3A cannulated screw L10 mm
256 428	bePOD 3A cannulated screw L12 mm
256 429	bePOD 3A cannulated screw L14 mm
256 430	bePOD 3A cannulated screw L16 mm
256 431	bePOD 3A cannulated screw L18 mm
256 432	bePOD 3A cannulated screw L20 mm
256 433	bePOD 3A cannulated screw L22 mm
256 434	bePOD 3A cannulated screw L24 mm
256 435	bePOD 3A cannulated screw L26 mm
256 436	bePOD 3A cannulated screw L28 mm
256 437	bePOD 3A cannulated screw L30 mm
256 438	bePOD 3A cannulated screw L32 mm
256 439	bePOD 3A cannulated screw L34 mm

PERCUTANEOUS SCREWS Ø3			
REF.	DESCRIPTION		
256 427	bePOD percutaneous cannulated screw L10 mm		
256 428	bePOD percutaneous cannulated screw L12 mm		
256 429	bePOD percutaneous cannulated screw L14 mm		
256 430	bePOD percutaneous cannulated screw L16 mm		
256 431	bePOD percutaneous cannulated screw L18 mm		
256 432	bePOD percutaneous cannulated screw L20 mm		
256 433	bePOD percutaneous cannulated screw L22 mm		
256 434	bePOD percutaneous cannulated screw L24 mm		
256 435	bePOD percutaneous cannulated screw L26 mm		
256 436	bePOD percutaneous cannulated screw L28 mm		
256 437	bePOD percutaneous cannulated screw L30 mm		
256 438	bePOD percutaneous cannulated screw L32 mm		
256 439	bePOD percutaneous cannulated screw L34 mm		





FR, FH ORTHO SAS

3 rue de la Forêt - Zone Industrielle BP 50009 68990 Heimsbrunn CEDEX - FRANCE Tél. +33 (0)3 89 81 90 92 Fax : +33 (0)3 89 81 80 11 info@fhortho.com www.fhortho.com

USA, FH ORTHO INC.

OrthoEx 16000 North 80th Street Suite E Scottsdale, Arizona 85260 - USA Phone: +1 (412) 965-0950 customerservice@fhortho-us.com www.fhortho.com

UK, FH ORTHO LTD

Unit 1b, Century Park, Valley way Swansea Enterprise Park Swansea, SA6 8RP - UK Phone: +44 (0) 1792 464792 Fax: +44 (0) 844 412 7674 customer-servicesUK@fhortho.com www.fhortho.com

PL, FH ORTHO POLSKA

UI. Garbary 95/A6, 61-757 Poznan - POLSKA Phone: +48 61 863 81 27 Fax: +48 61 863 81 28 biuro@implants24.pl www.fhortho.com



6 rue Nobel, Z.I. de Kernevez 29000 QUIMPER - FRANCE Tél. +33 (0)2 98 55 68 95 Fax : +33 (0)2 98 53 42 13 contact-fhi@fhortho.com www.fhortho.com